




尺寸 Dimensions (mm)

尺寸单位: mm, 误差 ± 0.2mm

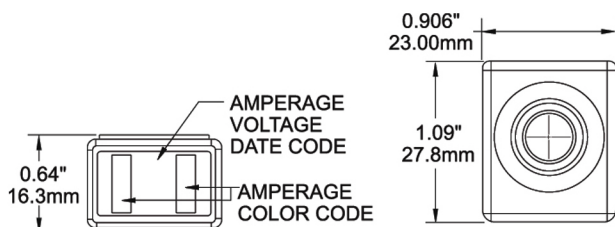

Specifications

Amperage	30A-300A
Ignition Protected ⓘ	Yes
Maximum Voltage	58V DC
Interrupt Capacity ⓘ	10000A @ 14V DC 5000A @ 32V DC 2000A @ 58V DC
Weight	0.06lb (0.03 kg)

Ignition protected (conforming to SAE J1171) - safe for installation aboard gasoline powered boats (30-300 Amp only)

Operating Times

Rating	100%	135%		200%		350%		600%
		min	max	min	max	min	max	
30A - 300A	> 100 hrs	-	900s	-	60s	0.1s	1s	< 0.2s

CFM CERAMIC CUBE FUSE

陶瓷保险丝

Waterproof Type

目录编号Catalog No.	额定电压Voltage Rating	额定电流Ampere Rating	颜色Color
CFM-30	58V	30Amp	Cyan
CFM-40	58V	40Amp	Blue
CFM-50	58V	50Amp	Red
CFM-60	58V	60Amp	Golden
CFM-75	58V	75Amp	Oxblood red
CFM-80	58V	80Amp	Green
CFM-90	58V	90Amp	Violet
CFM-100	58V	100Amp	Yellow
CFM-125	58V	125Amp	Sky blue
CFM-150	58V	150Amp	Orange
CFM-175	58V	175Amp	White
CFM-200	58V	200Amp	Navy blue
CFM-250	58V	250Amp	Pink
CFM-300	58V	300Amp	Grey



Temperature Derating / Time Current Curves

